

SPECIFICATION FOR APPROVAL

TO : _____

REF. No. _____

APPROVED DATE	CHECKED DATE	PREPARED DATE

MODEL No. AA 1 7 5 2 H B - A W P.S. (2 V)

DESCRIPTION: AC FAN (Lead Free) REV. A

ID No. _____

THIS OFFER IS MADE ACCORDING TO YOUR CURRENT INQUIRY.
UNLESS OTHERWISE REVISED, THIS SPECIFICATION WILL BE FINAL FOR
ALL FUTURE PRODUCTION OF ORDERS FROM YOUR RESPECTED COMPANY

KINDLY STUDY IN DETAILS AND RETURN TO US THE DUPLICATE DULY
SIGNED AS YOUR CONFIRMATION OF SAME.



ADDA CORP.
REGISTERED TO ISO 9001
ISO/TS 16949
CERTIFICATE NO. A8035

ADDA ADDA CORPORATION

BRUSHLESS AXIAL COOLING FAN

CUSTOMER : 巴西		ID:
PRODUCT RANGE : AC FAN		MODEL NO: AA1752HB-AW P.S: (2V)
SAMPLES: <input type="checkbox"/> ATTACHED <input checked="" type="checkbox"/> ENGINEERING SAMPLE <input type="checkbox"/> PRE-PRODUCTION SAMPLE <input type="checkbox"/> PRODUCTION SAMPLE		PCS., REF. <u>10 PCS</u>
SAFETY APPROVAL / STANDARD		
<input checked="" type="checkbox"/> UL <input checked="" type="checkbox"/> CUL <input type="checkbox"/> CSA <input checked="" type="checkbox"/> TUV <input checked="" type="checkbox"/> CE <input type="checkbox"/> BS <input type="checkbox"/> T-MARK <input type="checkbox"/> GS		
<u>SPECIFICATIONS</u>		
<u>ITEM</u>	<u>SPECIFICATION / CONDITIONS</u>	
MEASUREMENTS	: 172 x150 x50MM	
BEARING TYPE	: <input type="checkbox"/> SLEEVE <input checked="" type="checkbox"/> BALL <input type="checkbox"/> HYPRO	
RATED VOLTAGE	: 230 VAC	
	: 115 VAC	
OPERATING VOLTAGE RANGE	: 220 – 240 VAC	
	: 110 – 120 VAC	
OPERATING FREQUENCY	: 50/60 Hz	
RATED CURRENT	: 0.27/0.23 A (at 230 rated voltage)+10% ↓	
	: 0.48/0.43 A (at 115 rated voltage) +10% ↓	
INPUT POWER	: 47.90/38.40 Watt (at 230 rated voltage) ↓	
	: 59.60/39.30 Watt (at 115 rated voltage) ↓	
RATED SPEED	: 2600/2800 RPM ±10%	
AIR FLOW	: 195.0/205.0 CFM ±10%	
STATIC PRESSURE	: 0.415/0.225 INCH-H20 (min at zero air flow)	
NOISE LEVEL	: 52.3/50.0 dB/A	
NET WEIGHT	: 940 GRAM	
PACKING	: 20 PCS PER EXPORT CARTON	
ADDA CORPORATION	MODEL NO.: AA1752HB-AW P.S.(2V)	PAGE 1 / 5

S P E C I F I C A T I O N

1.0 Scope : This documentation defines the mechanical & electrical characteristics of AC brush less fans.

2.0 Material:

2.1 Housing High quality aluminum die-casting frame flated with black paint.

2.2 Fan blade UL 94V-0 Glass filled polyester (P.B.T)

2.3 Bearing Sys Oil impregnated sleeve
 Ball Bearing: Japan
 Hypro Bearing
 one Ball one Sleeve
 Lead Free (V) YES

2.4 Lead wire UL 1430,18AWG

2.5 Connector Not included in this fan

Note as: _____

3.0 Dimension & construction: All dimension, direction of rotation and air flow, rated characteristics are specification in drawing & data-sheet of enclosed.

4.0 Characteristics definition:

4.1 Rated current: Rated current shall be measured after 3 minutes continuous rotation at rated voltage.

4.2 Rated speed: Rated speed shall be measured after 3 minutes continuous rotation at rated voltage.

4.3 Start voltage: The voltages that enable to start the fan by sudden switch on.

4.4 Input power: Input power shall be measured after 3 minutes continuous rotation at rated voltage.


S P E C I F I C A T I O N

=====

4.5 Locked current: Locked current shall be measured within one minute or rotor locked, After 30 minutes continuous rotation at rated voltage in clean air.

4.6 Air flow & static pressure: The air flow data and static pressures are determined in accordance with AMCA standard or DIM 24163 specification in a double-chamber testing with intake-side measurement .

4.7 Noise level: The measurement of noise level is carried out with reference to DIM 45635 in a anechoic chamber with the microphone positioned 1 M form the air intake. Testing fan shall be hung in clean air.

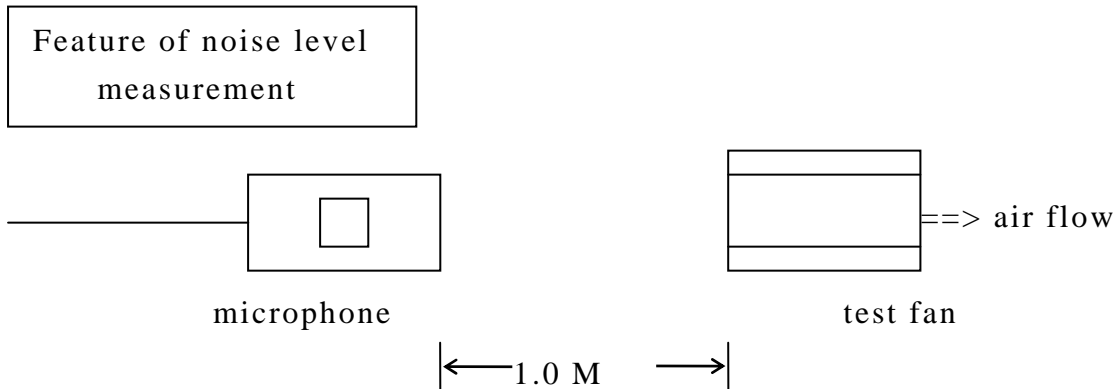

5.0 Mechanical inspection

5.1 Rotation direction: Clockwise from the front face of the fan. A clear “ ==> ” (arrow mark) shall be found on the body of housing.

5.2 Safe design: All fans have intergrated protection against locked rotor condition so that there can be no damage on winding and/or any electrical components. Restart is automatic as soon as any constraint to running has been released.

S P E C I F I C A T I O N

=====

5.3 Locked rotor protection: No damage shall be found for continuous 72 hours at condition of rotation locked . Restart is automatic as soon as constraint to running has be released.

5.5 Free drop shock: In minute package condition , The fan should withstand each one drop of three faces from 30 cm distance height onto 10 mm thickness of wooden board.

6.0 Electrical inspection

6.1 Insulation resistance : 100M Ω or more at 500V megger

6.2 Dielectric strength : 1 minute at 1500 VAC / 50-60Hz

AC(60Hz) 1000V 3M, or 1500V. (2 SEC)

Bearing type	Temperature	Hours
Sleeve bearing		
Ball bearing	40°C	60000
Hypro bearing		

SPECIFICATION

7.0 Environmental

7.1 Operating Temperature: $-10^{\circ}\text{C} \sim +80^{\circ}\text{C}$

7.2 Humidity RH: 20% \sim 85% (Max)

7.3 Storage Temperature: Will satisfy performance standards after 500hours storage at $-40^{\circ} \sim 70^{\circ}$ (normal humidity)with a 24 hour recovery period at room temperature.

7.4 Humidity: After 96 hrs, 95% RH, $40 \pm 2^{\circ}$ per MIL-STD-202F,method103B, Humidity test, The measured data of insulation resistance & dielectric strength should meet the specification listed in attach.

7.5 Thermal Shock: After thermal shock test per MIL-STD-202F method 107G, condition D, The measured data of insulation resistance & dielectric strength should the specification listed in data sheet.

8.0 Remark

8.1 Material and construction are subject to change without advance notice. The changes should be within specification listed in this approved sheet.

8.2 All the fans shall meet the inspection under sampling plan MIL-STD-105D, The AQL are as follow:

Critical	AQL = 0.25 %
Major	AQL = 1.0 %
Minor	AQL = 2.5 %

9.0 Drawing

